

Squba 1.80 and 3.60mm-Pitch Sealed Wire-To-Wire Connector System >

Squba 1.80 and 3.60mm-Pitch Sealed Wire-to-Wire Connector Systems are designs that offer an IP68-seal rating and carry up to 14.0A of current to deliver reliable power in a wide range of space-constrained applications

FEATURES AND ADVANTAGES

Protected, low-profile positive latch

Prevents wire from getting caught on latch and damaging it. Minimizes latch size to prevent latch from adding to connector's package size

Mated housings

Offer receptacle and plug housings to fit design need

Weather caps

Protect seals from damage during shipping, handling and use

Sealed components with proven performance


Deliver an IP68-sealed rating. Prevents ingress of dust and water to ensure reliable connection

Voided circuit options (1.80mm-pitch version)


Offer design flexibility for 3, 5, 7 and 9 circuit needs

Clean-body terminals

Avoid seal punctures

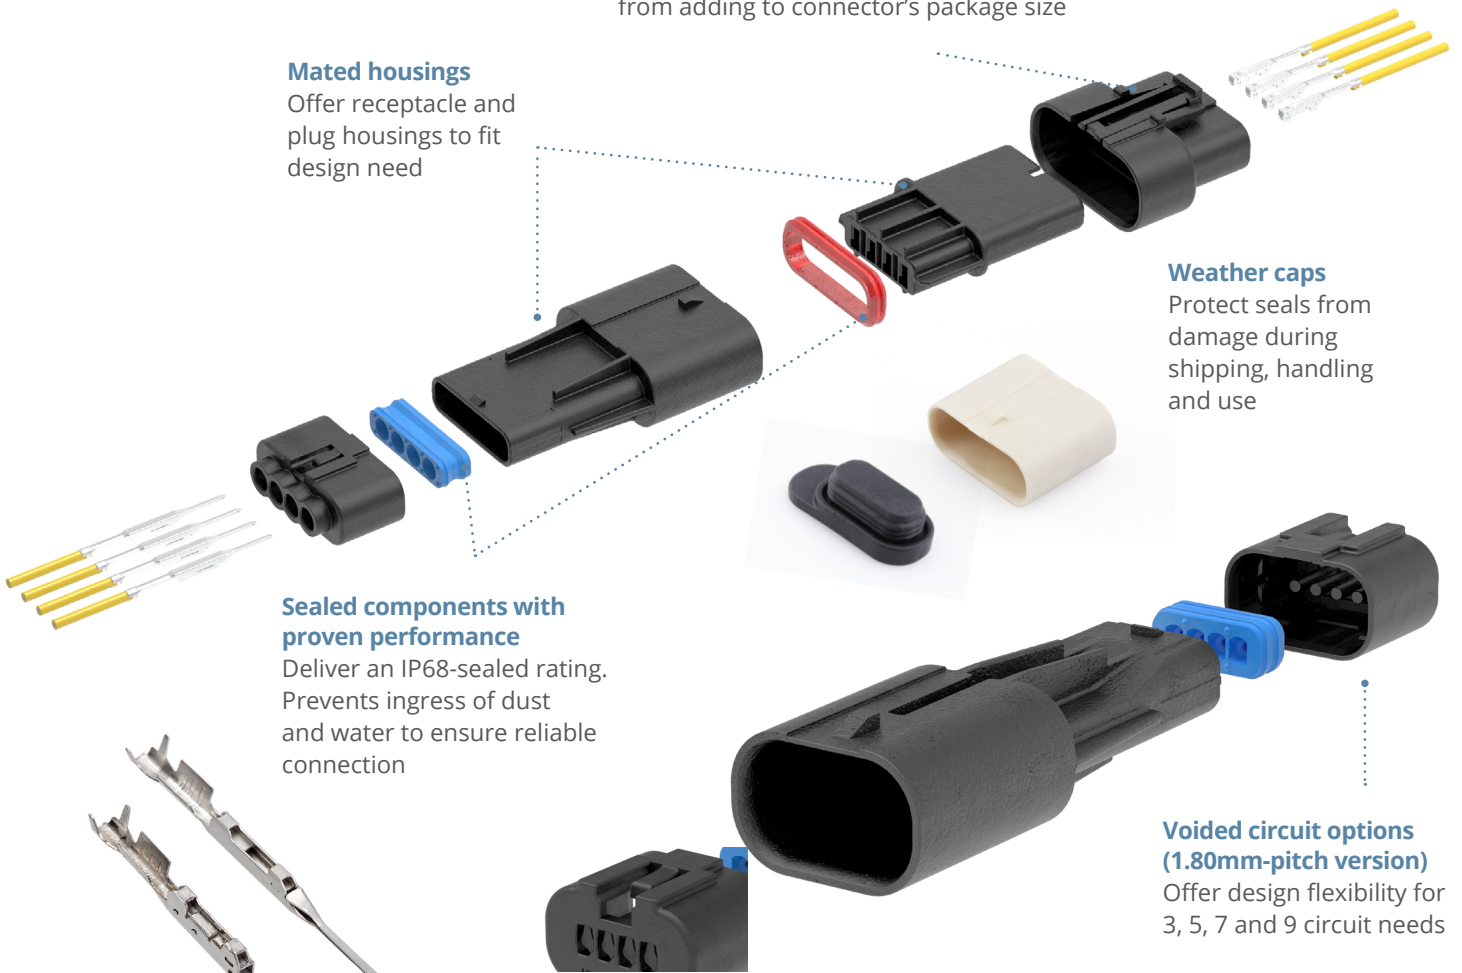

Squba 3.60mm-Pitch Sealed Connector Family, Fully Mated, 2 to 4 Circuits, with a Current of up to 14.0A

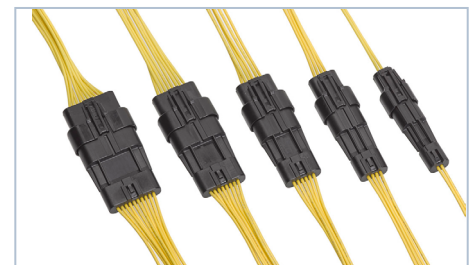

Squba 1.80mm-Pitch Sealed Connector Family, Fully Mated, 2 to 10 circuits, Void Options Available for 3-, 5-, 7- and 9-Circuit Needs, with a Current of up to 6.0A

Squba 1.80 and 3.60mm-Pitch Sealed Wire-To-Wire Connector System >

MARKETS AND APPLICATIONS

Consumer

Liquid dispensing equipment
HVAC equipment
Landscaping equipment

Commercial vehicle

ATV
Marine: under-dash wiring, lighting
Forklifts
Trucks
Buses
Recreational vehicles

Industrial

Robotics
Industrial machines and motors
Food processing equipment/plants
Industrial controls

Connected Home

Security and surveillance equipment
Smart appliances
Home health and wellness equipment
Home automation systems



HVAC



Robotic Arm



Security Systems



ATV

SPECIFICATIONS

REFERENCE INFORMATION

Receptacle Packaging: Tray
Plug Packaging: Bulk
Crimp Terminal Packaging: Reels
UL File No.: TBD
CSA File No.: TBD

	1.80mm	3.60mm
Use With:	22 to 24 AWG	16 to 20 AWG
Insulation		
Diameter:	0.95 to 1.40mm	1.50 to 2.40mm
Designed In:	Millimeters	
RoHS:	Yes	
Halogen Free:	No	
Glow Wire Compliant:		
Yes (3.60mm)		
No (1.80mm)		
IP Rating:	IP68	

ELECTRICAL

	1.80mm	3.60mm
Voltage (max.):	125V	600V
Current (max.):	6.0A	14.0A
Contact Resistance:	10 milliohms	
Dielectric Withstanding Voltage:	Leakage < 5mA	
Insulation Resistance (min.):	100 Megohms	

MECHANICAL

Terminal Retention to Housing (min.): 30N
Mating Force (max.): 45N
Unmating Force (max.): 35N
Durability (max.): 10 Cycles

PHYSICAL

Housing: Plastic
Contact: Copper Alloy
Plating:
Overall — Tin
Underplating — Nickel
Operating Temperature: -40 to +105°C

Squba 1.80 and 3.60mm-Pitch Sealed Wire-To-Wire Connector System >

ORDERING INFORMATION

Squba 1.80mm Receptacles

Parts	Description	Circuits	Seal Plug Position
2042200002	Sealed Receptacles	2	none
2042200004		4	
2042200006		6	
2042200008		8	
2042200010		10	
2042201110		9	10
2042204004		3	4
2042206006		5	6
2042208008		7	8

Squba 1.80mm Plugs

Parts	Description	Circuits	Seal Plug Position
2042230002	Sealed Plugs	2	none
2042230004		4	
2042230006		6	
2042230008		8	
2042230010		10	
2042231110		9	10
2042234004		3	4
2042236006		5	6
2042238008		7	8

Squba 1.80mm Terminals

Parts	Description	Wire Gauge (AWG)
Receptacle Terminals		
2043010001	Matte Tin Plating	22-24
Plug Terminals		
2042261001	Matte Tin Plating	22-24

Squba 3.60mm Receptacles

Part No.	Component	Circuits
2077820002	Sealed Receptacles	2
2077820003		3
2077820004		4

Squba 3.60mm Terminals

Series	Description	Wire Gauge (AWG)	
Receptacle Terminals			
2077770001	Matte Tin Plating	16	Reel
2077770002		18-20	
Plug Terminals			
2077760001	Matte Tin Plating	16	Reel

Squba 3.60mm Plugs

Part No.	Component	Circuits
2077780002	Sealed Plugs	2
2077780003		3
2077780004		4

Series	Component	Circuits
220423	Squba Plug Weather Caps	2, 4, 6, 8 and 10
220424	Squba Receptacle Weather Caps	

www.molex.com/link/squba.html